




## ► Overview

CTIMUX is a software component that dispatches the CSTA protocol messages back and forth between multiple CSTA CTI Client Applications and one Panasonic IP-PBX.

The software component is designed and implemented as server (CTIMUX Server) having the CTI applications as clients.

## ► Key Features


- Easy to use and simple GUI
- Connects to PBX via IP or USB (USB driver included)
- CTI MUX can run on a separate host or can be installed on the same host with any of the 3rd-party CTI Applications
- CTI MUX does not affect the normal PBX functionality over the CTI link
- Support up to 8 simultaneous CTI connections

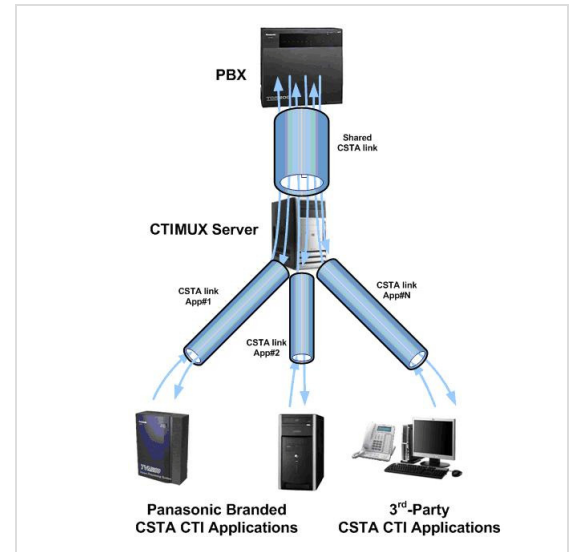

## Benefits

- Have more than one CSTA CTI Client application working on the same PBX
- The normal PBX functionality over the CTI link not affected
- Client CTI Applications operate as they would be connected directly to the PBX

## System Requirements

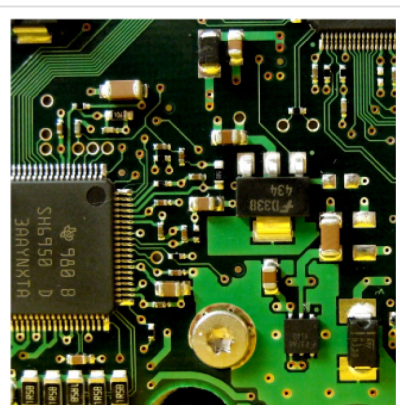

- KX-TDA 30/50/100/200/600, KX-TDE 100/200/600, KX-NCP 500/1000, with USB or TCP/IP connection to CCServer Host
- Microsoft Windows XP Professional SP3, Microsoft Windows Server 2003, Microsoft Windows Server 2008, Microsoft Windows Vista Business (with UAC disabled), Microsoft Windows 7 Professional (with UAC disabled)
- The CTIMUX is able to run either on a separate host or it can be installed on the same host with any of the Panasonic Branded or 3rd-party CTI Application